


# Cartridge

257 Wby Mag - 110 grain

Version 9.0

NOSLER®

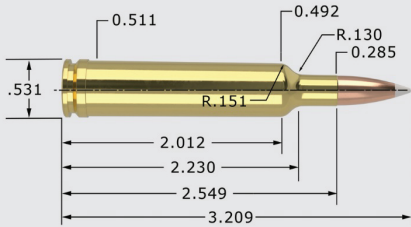

257 Wby Mag - 110 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.				3.209"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®			AB	110gr. Spitzer	3.209"	0.418	0.238
CASE TYPE:	Nosler			PRIMER TYPE		Fed 215	
CASE HOLDS:	81.0	Gr.	WATER	BARREL Length/Make		26" Lilja	
				BARREL Twist		1-10"	
POWDER TYPE	POWDER CHG. GRS.			MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)	
IMR 4831	65.0	MAX.	3283	<div></div>		86%	
	63.0	*	3196	<div></div>		83%	
	61.0		3110	<div></div>		81%	
Hunter	63.0	* MAX.	3305	<div></div>		80%	
	61.0		3220	<div></div>		78%	
	59.0		3136	<div></div>		75%	
N165	69.5	MAX.	3340	<div></div>		95%	
	67.5	*	3256	<div></div>		93%	
	65.5		3172	<div></div>		90%	
IMR 4350	64.0	MAX.	3376	<div></div>		85%	
Most Accurate	62.0		3289	<div></div>		82%	
Powder Tested	60.0	*	3201	<div></div>		79%	
H4831SC	68.5	MAX.	3384	<div></div>		88%	
	66.5	*	3305	<div></div>		86%	
	64.5		3226	<div></div>		83%	
RL19	67.0	MAX.	3384	<div></div>		90%	
	65.0		3317	<div></div>		87%	
	63.0	*	3250	<div></div>		85%	
H1000	74.0	MAX.	3447	<div></div>		97%	
	72.0		3375	<div></div>		94%	
	70.0	*	3303	<div></div>		91%	
RL22	69.5	* MAX.	3470	<div></div>		93%	
	67.5		3383	<div></div>		91%	
	65.5		3297	<div></div>		88%	
IMR 7828	71.0	MAX.	3483	<div></div>		93%	
	69.0	*	3374	<div></div>		91%	
	67.0		3265	<div></div>		88%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested  
\*\* = Compressed load