


CARTRIDGE

30-06 Springfield Ackley Improved - 200 grain

Version 8.0

Nosler®  
UP FRONT

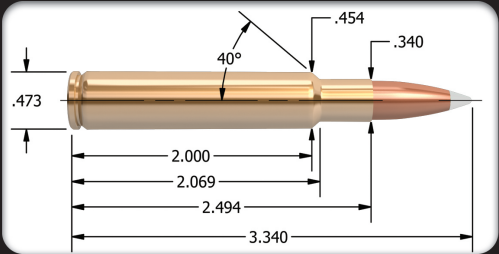

30-06 Springfield A.I. - 200 grain

30 Cal. (.308")

MAXIMUM O.A.C.L. 3.340"

B.C. S.D.

AccuBond®	200gr. Spitzer		0.588	0.301
Partition®	200gr. Spitzer		0.481	0.301

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	63.0 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	55.5 * MAX.	2651	93%
	53.5	2550	90%
	51.5	2448	87%
H4831	59.0 * MAX.	2656	98%
	57.0	2571	94%
	55.0	2487	91%
Viht N165	60.5 * MAX.	2673	** 107%
	58.5	2591	** 103%
	56.5	2509	100%
RL19 Most Accurate Powder Tested	57.5 MAX.	2737	99%
	55.5	2649	96%
	53.5 *	2562	92%
RL22	59.5 * MAX.	2768	** 103%
	57.5	2670	99%
	55.5	2572	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load