


# CARTRIDGE

330 Dakota - 200/210 grain

Version 8.0

Nosler®  
UP FRONT

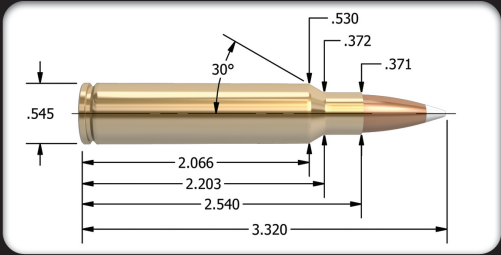

330 Dakota - 200/210 grain

338 Cal. (.338")

MAXIMUM O.A.C.L. 3.320"

B.C. S.D.

AccuBond®	200gr. Spitzer		0.414	0.250
CT® Ballistic Silvertip®	200gr. Spitzer		0.414	0.250
E-Tip®	200gr. Spitzer		0.425	0.250
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	210gr. Spitzer		0.400	0.263
CASE TYPE:	Dakota	PRIMER TYPE	Fed 215	
CASE HOLDS:	86.0 Gr. WATER	BARREL Length/Make	26" Lilja	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL19	83.0 MAX.	2948	** 105%
	81.0	2891	** 102%
	79.0 *	2786	100%
IMR 4350	78.5 * MAX.	2975	97%
	76.5	2874	94%
	74.5	2803	92%
Viht N160 Most Accurate Powder Tested	81.0 MAX.	2989	** 105%
	79.0 *	2914	** 102%
	77.0	2832	99%
H4831SC	84.0 MAX.	2989	** 102%
	82.0	2959	99%
	80.0 *	2901	97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load