


CARTRIDGE

9.3x74R - 286 grain

Version 8.0

Nosler®  
UP FRONT

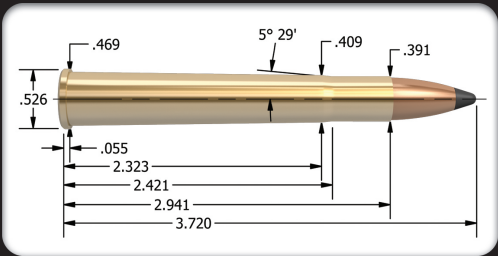

9.3x74R - 286 grain

9.3mm (.366")

MAXIMUM CIP O.A.C.L. 3.720"

TESTED O.A.C.L. B.C. S.D.

Partition®	286gr. Spitzer	3.710"	0.482	0.307
Solid®	286gr. Solid	3.700"	0.350	0.307
CASE TYPE:	Nosler	PRIMER TYPE	Fed. 210	
CASE HOLDS:	66.7 Gr. WATER	BARREL Length/Make	24" Lilja	
		BARREL Twist	1-14"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N140 Most Accurate Powder Tested	55.5 MAX.	2284	97%
	53.5 *	2212	93%
	51.5	2132	90%
Varget	54.5 MAX.	2324	88%
	52.5 *	2238	85%
	50.5	2165	82%
Viht N150	56.5 MAX.	2328	100%
	54.5	2260	96%
	52.5 *	2193	93%
RL15	58.0 MAX.	2350	91%
	56.0	2271	87%
	54.0 *	2204	84%
IMR 4831	64.5 * MAX.	2360	** 103%
	62.5	2304	100%
	60.5	2226	96%
IMR 4064	56.5 * MAX.	2373	93%
	54.5	2301	90%
	52.5	2211	86%
IMR 4350	64.5 MAX.	2398	** 102%
	62.5	2322	99%
	60.5 *	2253	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested

\*\* = Compressed load