


Cartridge

300 PRC - 210 grain

Version 9.0

NOSLER®

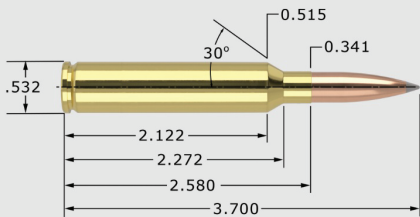

300 PRC - 210 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.700"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	gr. Spitzer	3.650"	0.661	0.316
Reduced Drag Factor™	RDF	gr. HPBT	3.650"	0.707	0.316

CASE TYPE:	Hornady	PRIMER TYPE	WLRM
CASE HOLDS:	88.0 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)
IMR 7977	78.0	MAX.	2881		95%
	76.0		2804		93%
	74.0	*	2727		90%
IMR 8133	81.5	MAX.	2920		** 102%
	79.5		2836		100%
	77.5	*	2752		97%
H1000	79.5	MAX.	2947		96%
	Most Accurate		2861		93%
	Powder Tested	75.5	* 2775		91%
US869	92.0	MAX.	3013		** 107%
	90.0		2957		** 105%
	88.0	*	2901		** 103%
MAGPRO	84.5	* MAX.	3083		99%
	82.5		3038		97%
	80.5	*	2992		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load