


Cartridge

17 Rem Fireball - 20 grain

Version 9.0

NOSLER®

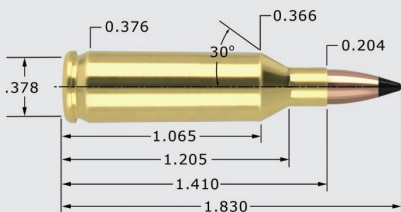

17 Rem Fireball - 20 grain

17 Cal. (.172")

MAXIMUM SAAMI O.A.C.L.		1.830"	TESTED O.A.C.L.	B.C.	S.D.
Varmageddon®	VMG	20gr. FBHP	1.780"	0.119	0.097
Varmageddon®	VMG	20gr. FB Tipped	1.800"	0.183	0.097
CASE TYPE:	Remington	PRIMER TYPE	Rem 7 1/2		
CASE HOLDS:	21.7 Gr. WATER	BARREL Length/Make	26" Pac-Nor		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL7	16.5 MAX.	3970	83%		
	15.5	3800	78%		
	14.5 *	3630	73%		
AA 2015	18.5 MAX.	3987	97%		
	17.5 *	3797	92%		
	16.5	3607	86%		
IMR 4198	16.5 * MAX.	4070	88%		
	15.5	3869	83%		
	14.5	3668	78%		
AA 2230	19.0 MAX.	4077	89%		
	18.0 *	3856	85%		
	17.0	3635	80%		
H335	20.0 MAX.	4093	94%		
	19.0 *	3849	89%		
	18.0	3605	84%		
H322	19.0 MAX.	4126	95%		
	18.0 *	3954	90%		
	17.0	3782	85%		
IMR 8208 XBR Most Accurate Powder Tested	20.0 * MAX.	4152	** 101%		
	19.0	3969	96%		
	18.0	3787	91%		
TAC	20.5 * MAX.	4158	96%		
	19.5	3944	91%		
	18.5	3731	87%		
CFE BLK	18.0 MAX.	4191	85%		
	17.0	3952	80%		
	16.0 *	3713	75%		
Benchmark	20.0 MAX.	4242	100%		
	19.0 *	4029	95%		
	18.0	3816	90%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load