


Cartridge

22-250 Ack Imp - 34/35 grain

Version 9.0

NOSLER®

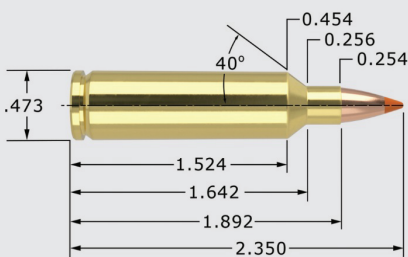

22-250 Ack Imp - 34/35 grain

22 Cal. (.224")

MAXIMUM O.A.C.L.		2.350"		TESTED O.A.C.L.	B.C.	S.D.
Nosler®	C&D	34gr. FBHP		2.230"	0.113	0.097
Ballistic Tip® Lead-Free	BTLF	35gr. Spitzer		2.350"	0.201	0.100
CASE TYPE:	Nosler		PRIMER TYPE		Rem 9 1/2	
CASE HOLDS:	46.3	Gr. WATER		BARREL Length/Make		26" Shilen
				BARREL Twist		1-14"
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)		
Big Game	45.0 MAX.	4285		99%		
	43.0 *	4102		95%		
	41.0	3919		90%		
H380	46.5 MAX.	4328		**	106%	
	44.5	4154		**	101%	
	42.5 *	3980		97%		
RL15	42.5 MAX.	4456		96%		
	40.5 *	4288		91%		
	38.5	4120		87%		
Varget	42.0 MAX.	4459		98%		
Most Accurate	40.0	4257		93%		
Powder Tested	38.0 *	4055		89%		
N140	41.0 MAX.	4468		**	103%	
	39.0 *	4265		98%		
	37.0	4062		93%		
IMR 4895	42.0 * MAX.	4556		99%		
	40.0	4315		94%		
	38.0	4074		89%		
IMR 4064	41.0 MAX.	4570		98%		
	39.0 *	4339		93%		
	37.0	4108		88%		
W748	43.0 * MAX.	4583		97%		
	41.0	4419		92%		
	39.0	4255		88%		
N135	40.5 MAX.	4654		**	102%	
	38.5	4458		97%		
	36.5 *	4262		92%		
IMR 3031	39.5 MAX.	4760		95%		
	37.5	4515		90%		
	35.5 *	4270		85%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load