


Cartridge

22-250 Ack Imp - 40 grain

Version 9.0

NOSLER®

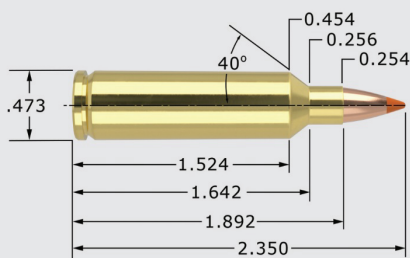

22-250 Ack Imp - 40 grain

22 Cal. (.224")

MAXIMUM O.A.C.L.		2.350"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	BTLF	40gr. Spitzer	2.350"	0.220	0.114
Ballistic Tip® Varmint	BTV	40gr. Spitzer	2.350"	0.221	0.114
Varmageddon®	VMG	40gr. FB Tipped	2.350"	0.211	0.114

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	48.0 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4895	41.0 * MAX.	4124	93%
	39.0	3883	88%
	37.0	3642	84%
H380	46.5 MAX.	4129	** 102%
	44.5	3955	98%
	42.5 *	3781	93%
RL15	41.5 MAX.	4195	90%
	39.5 *	3986	86%
	37.5	3777	81%
N135	39.5 MAX.	4199	96%
	37.5	4003	91%
	35.5 *	3806	86%
N140	40.0 MAX.	4204	97%
	38.0 *	4019	92%
	36.0	3835	87%
Big Game	44.0 MAX.	4208	94%
	42.0 *	4018	89%
	40.0	3828	85%
Varget	41.0 MAX.	4210	92%
	39.0	4005	88%
	37.0 *	3801	83%
W748	42.0 * MAX.	4217	91%
	40.0	4053	87%
	38.0	3888	82%
IMR 4064	40.0 * MAX.	4299	92%
	38.0	4066	87%
	36.0	3834	83%
IMR 3031	38.5 MAX.	4335	89%
Most Accurate	36.5 *	4100	84%
Powder Tested	34.5	3866	80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load