


# Cartridge

## 22-250 Ack Imp - 50/52/53 grain

Version 9.0

# NOSLER®

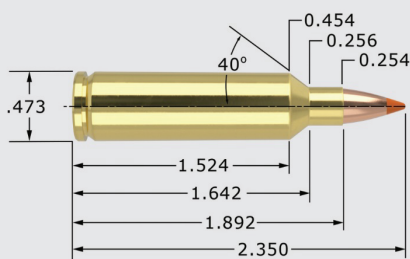

## 22-250 Ack Imp - 50/52/53 grain

## 22 Cal. (.224")

MAXIMUM O.A.C.L.		2.350"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	<b>BTLF</b>	50gr. Spitzer	2.350"	0.251	0.142
Ballistic Tip® Varmint	<b>BTV</b>	50gr. Spitzer	2.350"	0.238	0.142
Nosler®	<b>CSB</b>	50gr. FBHP	2.350"	0.192	0.142
Nosler®	<b>CSB</b>	50gr. FBSP	2.350"	0.195	0.142
Varmageddon®	<b>VMG</b>	50gr. FB Tipped	2.350"	0.227	0.142
Custom Competition®	<b>CC</b>	52gr. HPBT	2.350"	0.220	0.148
Varmageddon®	<b>VMG</b>	53gr. FB Tipped	2.350"	0.303	0.152

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	47.0 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>N140</b>	38.0 MAX. 3805		94%
	36.0 3603		89%
	34.0 * 3402		84%
<b>N540</b>	39.0 MAX. 3828		92%
	37.0 * 3653		87%
	35.0 3478		83%
<b>Big Game</b>	42.0 MAX. 3840		91%
	40.0 3683		87%
	38.0 * 3527		83%
<b>IMR 4064</b>	38.0 MAX. 3854		89%
	36.0 * 3621		85%
	34.0 3388		80%
<b>IMR 3031</b>	36.5 MAX. 3875		86%
	34.5 * 3666		82%
	32.5 3457		77%
<b>RL15</b>	40.0 MAX. 3877		89%
	38.0 3702		84%
	36.0 * 3527		80%
<b>W760</b>	43.0 MAX. 3903		96%
	41.0 3708		91%
	39.0 * 3514		87%
<b>Varget</b>	40.0 * MAX. 3922		92%
Most Accurate	38.0 3730		87%
Powder Tested	36.0 3539		83%
<b>IMR 4895</b>	40.0 * MAX. 3951		93%
	38.0 3745		88%
	36.0 3539		83%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load