


# Cartridge

## 22-250 Ack Imp - 55 grain

Version 9.0

# NOSLER®

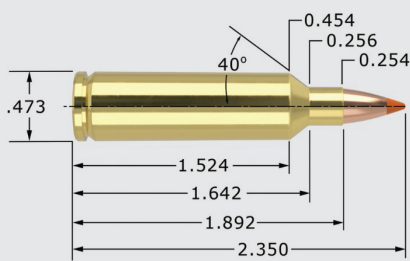

## 22-250 Ack Imp - 55 grain

## 22 Cal. (.224")

MAXIMUM O.A.C.L.		2.350"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	<b>BTV</b>	55gr. Spitzer	2.350"	0.267	0.157
Nosler®	<b>CB0</b>	55gr. FBHP	2.350"	0.210	0.157
Nosler®	<b>CB0</b>	55gr. FBSP	2.350"	0.218	0.157
Varmageddon®	<b>VMG</b>	55gr. FB Tipped	2.350"	0.255	0.157

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	47.0 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 3031</b> Most Accurate Powder Tested	35.5 MAX. 3648		84%
	33.5 * 3460		79%
	31.5 3273		74%
<b>IMR 4320</b>	38.5 MAX. 3704		89%
	36.5 * 3467		84%
	34.5 3230		80%
<b>W760</b>	42.0 MAX. 3724		94%
	40.0 3549		89%
	38.0 * 3375		85%
<b>Varget</b>	38.0 MAX. 3725		87%
	36.0 * 3558		83%
	34.0 3391		78%
<b>Big Game</b>	41.5 MAX. 3733		90%
	39.5 3578		86%
	37.5 * 3424		81%
<b>IMR 4895</b>	37.0 MAX. 3743		86%
	35.0 * 3567		81%
	33.0 3392		76%
<b>H414</b>	44.5 MAX. 3753		99%
	42.5 3552		94%
	40.5 * 3351		90%
<b>N140</b>	39.0 MAX. 3753		96%
	37.0 3597		92%
	35.0 * 3441		87%
<b>IMR 4064</b>	39.0 * MAX. 3787		92%
	37.0 3603		87%
	35.0 3419		82%
<b>RL15</b>	38.5 MAX. 3788		85%
	36.5 3642		81%
	34.5 * 3497		76%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load