


Cartridge

22-250 Rem - 34/35 grain

Version 9.0

NOSLER®

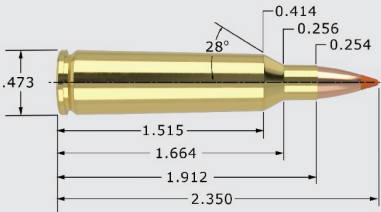

22-250 Rem - 34/35 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.			2.350"	TESTED O.A.C.L.	B.C.	S.D.
Nosler®	C&D	34gr. FBHP		2.350"	0.113	0.097
Ballistic Tip® Lead-Free	BTLF	35gr. Spitzer		2.350"	0.201	0.100
CASE TYPE:	Nosler		PRIMER TYPE			WLR
CASE HOLDS:	40.9	Gr. WATER	BARREL Length/Make			24" Lilja
			BARREL Twist			1-14"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL15	39.0	MAX.	4354			99%
	37.0		4092			94%
	35.0	*	3830			89%
H335	38.0	MAX.	4403			94%
	36.0		4200			89%
	34.0	*	3998			84%
AA 2520	39.0	MAX.	4409			98%
	37.0		4217			93%
	35.0	*	4025			88%
IMR 4320	40.0	MAX.	4446		**	106%
	38.0		4206		**	101%
	36.0	*	3966			96%
W748	40.0	MAX.	4461		**	102%
Most Accurate	38.0		4286			97%
Powder Tested	36.0	*	4111			92%
Varget	40.0	MAX.	4462		**	106%
	38.0		4286			100%
	36.0	*	4109			95%
IMR 4895	39.0	MAX.	4491		**	104%
	37.0	*	4254			98%
	35.0		4018			93%
IMR 4064	38.0	* MAX.	4514		**	103%
	36.0		4253			97%
	34.0		3991			92%
TAC	38.5	MAX.	4543			96%
	36.5		4409			91%
	34.5	*	4275			86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load