


Cartridge

22-250 Rem (Fast Twist) - 40 grain

Version 9.0

NOSLER®

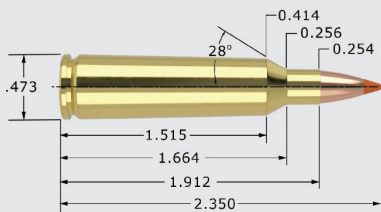

22-250 Rem (Fast Twist) - 40 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.350"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip® Lead-Free		BTLF	40gr. Spitzer	2.350"	0.220	0.114
CASE TYPE:	Nosler	PRIMER TYPE			WLR	
CASE HOLDS:	43.0	Gr. WATER	BARREL Length/Make			24" Wiseman
			BARREL Twist			1-8"
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
RL15	38.0	MAX. 4113	92%			
	36.0	3895	87%			
	34.0 *	3678	82%			
IMR 4320	36.0	MAX. 4121	91%			
	34.0 *	3894	86%			
	32.0	3668	81%			
IMR 4895	37.5	MAX. 4209	95%			
	Most Accurate Powder Tested	35.5 *	3965	90%		
		33.5	3722	85%		
W748	38.0	MAX. 4210	92%			
	36.0	3971	87%			
	34.0 *	3732	82%			
N140	37.5 *	MAX. 4223	** 101%			
	35.5	4009	96%			
	33.5	3795	91%			
N135	35.5	MAX. 4251	96%			
	33.5	4009	91%			
	31.5 *	3767	85%			
Varget	38.5	MAX. 4260	97%			
	36.5	4062	92%			
	34.5 *	3864	87%			
AA 2460	36.5	MAX. 4278	86%			
	34.5	4090	81%			
	32.5 *	3902	76%			
TAC	37.5	MAX. 4302	89%			
	35.5 *	4175	84%			
	33.5	4047	79%			
RL10x	34.5	MAX. 4338	90%			
	32.5 *	4120	85%			
	30.5	3902	80%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load