


Cartridge

22-250 Rem - 40 grain

Version 9.0

NOSLER®

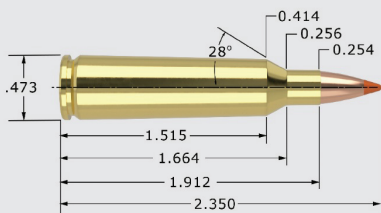

22-250 Rem - 40 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.350"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	BTLF 40gr. Spitzer	2.350"	0.220	0.114
The 40 grain BTLF requires a 1-12" twist (or faster) for reliable stability				
Ballistic Tip® Varmint	BTV 40gr. Spitzer	2.350"	0.221	0.114
Varmageddon®	VMG 40gr. FB Tipped	2.350"	0.211	0.114

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	43.0 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
IMR 4895	36.0 * MAX.	3961	91%	
	34.0	3678	86%	
	32.0	3395	81%	
RL15	37.0 * MAX.	3990	90%	
	35.0	3711	85%	
	33.0	3431	80%	
W760	41.0 * MAX.	3997	100%	
	39.0	3750	95%	
	37.0	3503	90%	
N140	37.5 MAX.	4006	** 101%	
	35.5	3763	96%	
	33.5 *	3519	91%	
AA 2460	35.5 MAX.	4050	83%	
	33.5	3833	79%	
	31.5 *	3616	74%	
H380	41.0 * MAX.	4070	100%	
	39.0	3776	95%	
	37.0	3482	91%	
PP Varmint	39.0 * MAX.	4085	92%	
	37.0	3888	87%	
	35.0	3690	82%	
Varget	38.0 MAX.	4100	96%	
	36.0	3863	91%	
	34.0 *	3625	85%	
TAC	37.5 MAX.	4178	89%	
	Most Accurate	35.5	3949	84%
	Powder Tested	33.5 *	3720	79%
CFE 223	42.5 MAX.	4322	99%	
	40.5	4107	94%	
	38.5 *	3893	90%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load