


Cartridge

22-250 Rem - 64 grain

Version 9.0

NOSLER[®]

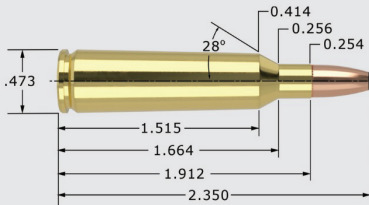

22-250 Rem - 64 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.350"	TESTED O.A.C.L.	B.C.	S.D.
Bonded Solid Base [®]	BSB 64gr. PPT	2.330"	0.231	0.182

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	41.9 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
--------------------	-------------------------	---------------------------	------------------------------

IMR 4007 SSC	35.5	MAX. 3355	91%
	33.5	3170	86%
	31.5 *	2986	81%
W760 Most Accurate Powder Tested	37.0	MAX. 3410	92%
	35.0 *	3257	87%
	33.0	3103	82%
CFE 223	35.0	MAX. 3444	84%
	33.0	3321	79%
	31.0 *	3199	74%
IMR 4350	38.0	MAX. 3478	97%
	36.0	3294	92%
	34.0 *	3110	87%
BL-C(2)	35.5	MAX. 3478	86%
	33.5 *	3330	81%
	31.5	3183	76%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load