


Cartridge

22-250 Rem (Fast Twist) - 69/70 grain

Version 9.0

NOSLER®

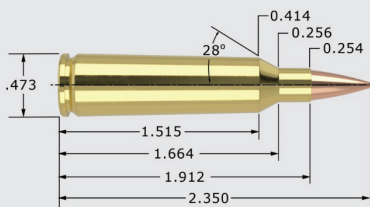

22-250 Rem (Fast Twist) - 69/70 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.350"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC 69gr. HPBT	2.600"	0.305	0.196
AccuBond®	AB 70gr. Spitzer	2.600"	0.370	0.199
Reduced Drag Factor™	RDF 70gr. HPBT	2.600"	0.416	0.199
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	41.3 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-8"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
IMR 4350	37.0 * MAX.	3172	96%	
	35.0	3008	91%	
	33.0	2843	85%	
AA 2015	30.0 MAX.	3221	83%	
	28.0 *	3049	77%	
	26.0	2877	72%	
N540	33.5 * MAX.	3274	90%	
	Most Accurate	31.5 3122	85%	
	Powder Tested	29.5 2971	79%	
Varget	32.5 MAX.	3283	85%	
	30.5 *	3112	80%	
	28.5	2942	75%	
RL15	33.0 MAX.	3305	83%	
	31.0	3144	78%	
	29.0 *	2982	73%	
Big Game	36.0 MAX.	3313	89%	
	34.0	3152	84%	
	32.0 *	2992	79%	
W760	36.5 MAX.	3334	93%	
	34.5 *	3164	87%	
	32.5	2995	82%	
IMR 4064	32.5 MAX.	3339	87%	
	30.5	3140	82%	
	28.5 *	2940	76%	
N550	36.0 MAX.	3396	97%	
	34.0 *	3189	91%	
	32.0	2982	86%	
H414	37.0 MAX.	3403	93%	
	35.0	3205	88%	
	33.0 *	3007	83%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load