


Cartridge

22-250 Rem (Fast Twist) - 77/80 grain

Version 9.0

NOSLER®

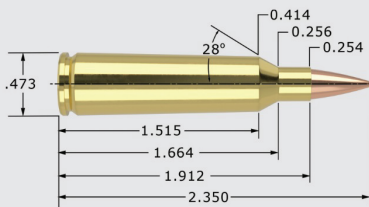

22-250 Rem (Fast Twist) - 77/80 grain 22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.350"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	77gr. HPBT	2.600"	0.340	0.219
Reduced Drag Factor™	RDF	77gr. HPBT	2.600"	0.454	0.219
Custom Competition®	CC	80gr. HPBT	2.600"	0.415	0.228

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	42.1 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N160 Most Accurate Powder Tested	35.0 MAX. 2974		92%
	33.0 2855		87%
	31.0 * 2735		82%
H4831SC	38.0 MAX. 3078		94%
	36.0 2912		89%
	34.0 * 2745		84%
IMR 4350	36.0 MAX. 3108		91%
	34.0 2946		86%
	32.0 * 2784		81%
IMR 4831	37.0 * MAX. 3124		94%
	35.0 2951		89%
	33.0 2777		84%
RL22	38.0 MAX. 3126		98%
	36.0 2951		93%
	34.0 * 2777		88%
H414	35.5 MAX. 3137		88%
	33.5 * 2975		83%
	31.5 2813		78%
H4350	36.0 MAX. 3137		90%
	34.0 2989		85%
	32.0 * 2842		80%
W760	36.0 MAX. 3164		90%
	34.0 * 3009		85%
	32.0 2855		80%
RL19	38.0 MAX. 3191		98%
	36.0 * 2984		93%
	34.0 2778		88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load