


Cartridge

22-250 Rem (Fast Twist) - 85 grain

Version 9.0

NOSLER[®]

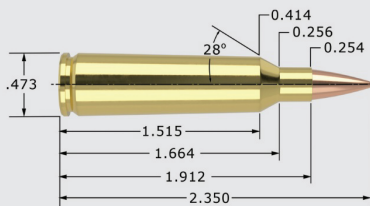

22-250 Rem (Fast Twist) - 85 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.350"		TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™		RDF	85gr. HPBT	2.600"	0.498	0.242
CASE TYPE:	Nosler		PRIMER TYPE		WLR	
CASE HOLDS:	40.1	Gr.	WATER	BARREL Length/Make		24" Wiseman
				BARREL Twist		1-8"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
N160	36.0	MAX.	2896	100%		
	34.0	*	2770	94%		
	32.0		2644	89%		
RL22	38.0	MAX.	2972	** 103%		
	36.0		2836	98%		
	34.0	*	2700	92%		
H4831SC	39.0	MAX.	2989	** 101%		
	37.0		2863	96%		
	35.0	*	2738	91%		
RL19 Most Accurate Powder Tested	39.0	MAX.	3032	** 106%		
	37.0	*	2879	100%		
	35.0		2726	95%		
W760	37.0	MAX.	3044	97%		
	35.0	*	2876	91%		
	33.0		2708	86%		
H414	36.5	MAX.	3052	95%		
	34.5		2877	90%		
	32.5	*	2703	84%		
IMR 4350	37.0	MAX.	3057	99%		
	35.0	*	2917	93%		
	33.0		2778	88%		
IMR 4831	37.5	MAX.	3113	100%		
	35.5	*	2967	95%		
	33.5		2820	89%		
H4350	37.0	* MAX.	3133	98%		
	35.0		3020	92%		
	33.0		2907	87%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load