


Cartridge

22 BR - 34/35 grain

Version 9.0

NOSLER®

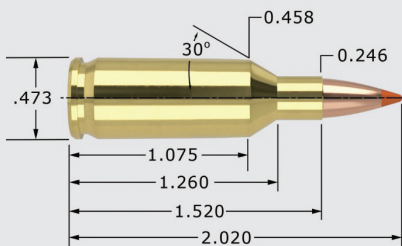

22 BR - 34/35 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.020"	TESTED O.A.C.L.	B.C.	S.D.
Nosler®	C&D	34gr. FBHP	1.850"	0.113	0.097
Ballistic Tip® Lead-Free	BTLF	35gr. Spitzer	2.020"	0.201	0.100
CASE TYPE:	Remington	PRIMER TYPE	WSR		
CASE HOLDS:	34.5 Gr. WATER	BARREL Length/Make	24" Lilja		
		BARREL Twist	1-14"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Varget	34.0 MAX. 4137		**	107%	
Most Accurate Powder Tested	32.0 * 3930			100%	
	30.0 3724			94%	
X-Terminator	33.5 MAX. 4238			100%	
	31.5 * 4001			94%	
	29.5 3764			88%	
AA 2015	32.5 MAX. 4243		**	107%	
	30.5 * 3983			100%	
	28.5 3723			94%	
N133	29.0 MAX. 4247			98%	
	27.0 * 4044			91%	
	25.0 3840			84%	
IMR 4198	28.5 MAX. 4280			96%	
	26.5 4093			89%	
	24.5 * 3907			82%	
IMR 3031	31.5 MAX. 4291		**	101%	
	29.5 * 4037			95%	
	27.5 3783			89%	
Benchmark	33.5 MAX. 4313		**	105%	
	31.5 * 4058			99%	
	29.5 3803			92%	
H322	32.5 MAX. 4329		**	102%	
	30.5 4084			96%	
	28.5 * 3840			89%	
AA 2460	34.0 * MAX. 4347			100%	
	32.0 4107			94%	
	30.0 3867			88%	
RL7	30.5 MAX. 4355			96%	
	28.5 4235			90%	
	26.5 * 4114			83%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load