


Cartridge

22 Nosler - 40 grain

Version 9.0

NOSLER®

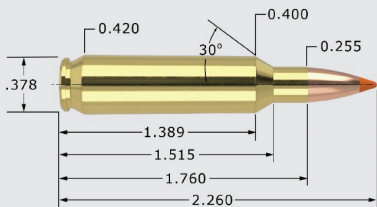

22 Nosler - 40 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV 40gr. Spitzer	2.260"	0.221	0.114
Ballistic Tip® Lead-Free	BTLF 40gr. Spitzer	2.260"	0.220	0.114
Varmageddon®	VMG 40gr. FB Tipped	2.225"	0.211	0.114

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	35.9 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL7	26.5 * MAX. 3730		80%
	25.5 3650		77%
	24.5 3570		74%
RL10x	28.0 * MAX. 3738		88%
	27.0 3618		85%
	26.0 3498		81%
AA 2015	29.5 * MAX. 3780		93%
	28.5 3601		90%
	27.5 3422		87%
H322 Most Accurate Powder Tested	30.5 * MAX. 3841		92%
	29.5 3698		89%
	28.5 3555		86%
H4198	27.5 MAX. 3853		86%
	26.5 * 3716		83%
	25.5 3579		80%
Benchmark	31.5 * MAX. 3885		95%
	30.5 3753		92%
	29.5 3620		89%
H335	32.5 MAX. 3909		92%
	31.5 * 3727		89%
	30.5 3545		86%
TAC	33.0 * MAX. 3913		93%
	32.0 3806		90%
	31.0 3699		88%
AA 2520	33.0 * MAX. 3914		95%
	32.0 3788		92%
	31.0 3662		89%
H4895	32.0 MAX. 3935		98%
	31.0 * 3766		95%
	30.0 3598		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load