


Cartridge

22 Nosler - 55 grain

Version 9.0

NOSLER®

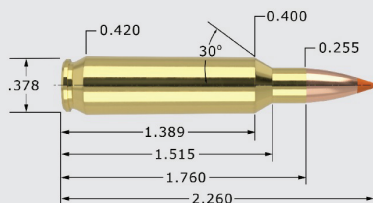

22 Nosler - 55 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV 55gr. Spitzer	2.260"	0.267	0.157
Expansion Tip®	ET 55gr. Spitzer	2.210"	0.305	0.157
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Nosler®	CD 55gr. FBHP	2.215"	0.210	0.157
Nosler®	CD 55gr. FBSP	2.260"	0.218	0.156
Varmageddon®	VMG 55gr. FB Tipped	2.260"	0.255	0.157

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	34.7 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2495	29.5 MAX. 3340		97%
	28.5 * 3189		93%
	27.5 3038		90%
Benchmark	28.5 * MAX. 3378		89%
	27.5 3304		86%
	26.5 3230		83%
Norma 202	30.0 MAX. 3395		98%
	29.0 * 3290		95%
	28.0 3186		92%
TAC	29.5 * MAX. 3402		86%
	28.5 3310		83%
	27.5 3219		80%
Varget Most Accurate Powder Tested	30.0 MAX. 3406		93%
	29.0 * 3249		90%
	28.0 3092		87%
W748	31.5 MAX. 3411		95%
	30.5 3300		92%
	29.5 * 3189		89%
RL15	31.5 MAX. 3437		95%
	30.5 * 3314		92%
	29.5 3191		89%
H335	30.5 MAX. 3438		89%
	29.5 * 3303		86%
	28.5 3168		83%
AA 2520	30.5 * MAX. 3444		91%
	29.5 3345		88%
	28.5 3246		85%
CFE 223	33.0 * MAX. 3518		95%
	32.0 3431		92%
	31.0 3344		89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load