


Cartridge

22 Nosler - 60/62 grain

Version 9.0

NOSLER®

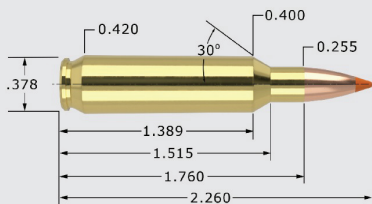

22 Nosler - 60/62 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	60gr. Spitzer	2.260"	0.270	0.171
Partition®	PT	60gr. Spitzer	2.260"	0.228	0.171
Varmageddon®	VMG	62gr. FBHP	2.260"	0.251	0.176
CASE TYPE:	Nosler		PRIMER TYPE	WSR	
CASE HOLDS:	35.2	Gr. WATER	BARREL Length/Make	24" H-S Prec.	
			BARREL Twist	1-8"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 2015	25.5 MAX.	3037	82%		
	24.5 *	2963	79%		
	23.5	2889	76%		
IMR 4166	27.0 * MAX.	3073	82%		
	26.0	2953	79%		
	25.0	2833	76%		
AA 2495	28.5 * MAX.	3152	92%		
	27.5	3042	89%		
	26.5	2932	86%		
Norma 202	28.0 * MAX.	3152	90%		
	27.0	3054	87%		
	26.0	2956	84%		
H335 Most Accurate Powder Tested	28.0 * MAX.	3179	81%		
	27.0	3077	78%		
	26.0	2975	75%		
TAC	28.5 * MAX.	3182	82%		
	27.5	3072	79%		
	26.5	2962	76%		
Varget	29.0 * MAX.	3214	89%		
	28.0	3116	86%		
	27.0	3018	83%		
BL-C(2)	31.0 * MAX.	3318	89%		
	30.0	3220	87%		
	29.0	3122	84%		
RL15	31.0 MAX.	3332	92%		
	30.0 *	3203	89%		
	29.0	3074	86%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load