


Cartridge

22 Nosler - 64 grain

Version 9.0

NOSLER®

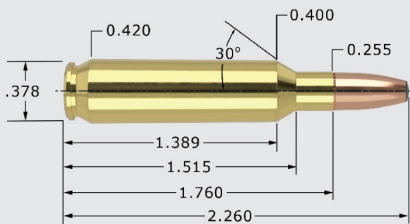

22 Nosler - 64 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260"		TESTED O.A.C.L.	B.C.	S.D.
Bonded Solid Base®		BSB	64gr. PPT	2.175"	0.231	0.182
CASE TYPE:	Nosler		PRIMER TYPE	WSR		
CASE HOLDS:	33.2	Gr. WATER	BARREL Length/Make	24" H-S Prec.		
			BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4166	27.0 * MAX.	3003		87%		
	26.0	2920		83%		
	25.0	2836		80%		
H335	26.5	MAX. 3023		81%		
	25.5 *	2928		78%		
	24.5	2832		75%		
Norma 202	27.0 * MAX.	3023		92%		
	26.0	2929		89%		
	25.0	2835		86%		
Varget Most Accurate Powder Tested	27.0	MAX. 3054		88%		
	26.0 *	2966		85%		
	25.0	2877		81%		
BL-C(2)	29.0 * MAX.	3082		89%		
	28.0	2988		86%		
	27.0	2894		83%		
TAC	28.0	MAX. 3087		86%		
	27.0 *	2980		83%		
	26.0	2873		80%		
AA 2520	28.5	MAX. 3103		88%		
	27.5	3001		85%		
	26.5 *	2899		82%		
W748	29.5	MAX. 3107		93%		
	28.5	3009		89%		
	27.5 *	2910		86%		
CFE 223	29.5 * MAX.	3117		89%		
	28.5	3017		86%		
	27.5	2916		83%		
RL15	29.0 * MAX.	3122		91%		
	28.0	3032		88%		
	27.0	2943		85%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load