


Cartridge

22 Nosler - 69/70 grain

Version 9.0

NOSLER®

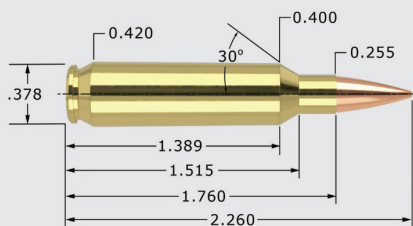

22 Nosler - 69/70 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	69gr. HPBT	2.260"	0.305	0.196
AccuBond®	AB	70gr. Spitzer	2.260"	0.370	0.199
Reduced Drag Factor™	RDF	70gr. HPBT	2.260"	0.416	0.199

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	33.3 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H335	27.0 * MAX.	3006	82%
	26.0	2912	79%
	25.0	2818	76%
W748	28.5 * MAX.	3045	89%
	27.5	2949	86%
	26.5	2853	83%
TAC	28.5 MAX.	3052	87%
	27.5 *	2938	84%
	26.5	2824	81%
Target Most Accurate Powder Tested	28.0 * MAX.	3054	91%
	27.0	2948	88%
	26.0	2842	84%
W760	32.0 * MAX.	3068	** 101%
	31.0	2972	97%
	30.0	2876	94%
AA 2520	28.5 * MAX.	3081	88%
	27.5	2946	85%
	26.5	2812	82%
CFE 223	30.0 * MAX.	3087	90%
	29.0	2982	87%
	28.0	2877	84%
RL15	29.0 * MAX.	3091	91%
	28.0	2990	88%
	27.0	2889	84%
H380	31.5 MAX.	3121	100%
	30.5 *	3019	96%
	29.5	2917	93%
BL-C(2)	30.5 * MAX.	3159	93%
	29.5	3027	90%
	28.5	2895	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load