


Cartridge

22 Nosler - 85 grain

Version 9.0

NOSLER®

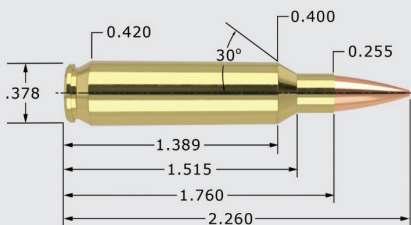

22 Nosler - 85 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™	RDF	85gr. HPBT	2.260"	0.498	0.242
CASE TYPE:	Nosler	PRIMER TYPE	WSR		
CASE HOLDS:	30.7 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 2520	27.0 MAX.	2755	91%		
	26.0 *	2618	87%		
	25.0	2481	84%		
W748	27.5 MAX.	2801	93%		
	26.5	2704	90%		
	25.5 *	2607	87%		
W760	30.0 MAX.	2814	**	102%	
	29.0 *	2717	99%		
	28.0	2620	96%		
RL15	27.5 MAX.	2834	93%		
	26.5	2725	90%		
	25.5 *	2616	87%		
H414	29.5 MAX.	2835	100%		
	28.5	2725	97%		
	27.5 *	2615	93%		
H380	30.0 * MAX.	2858	**	103%	
	29.0	2711	99%		
	28.0	2564	96%		
CFE 223 Most Accurate Powder Tested	28.5 * MAX.	2859	93%		
	27.5	2730	90%		
	26.5	2601	86%		
H4350	30.5 * MAX.	2880	**	105%	
	29.5	2796	**	102%	
	28.5	2712	98%		
RL16	30.5 * MAX.	2889	**	112%	
	29.5	2804	**	108%	
	28.5	2719	**	104%	
RL17	31.0 MAX.	2907	**	105%	
	30.0	2834	**	101%	
	29.0 *	2762	98%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load