


Cartridge

220 Swift - 34/35 grain

Version 9.0

NOSLER®

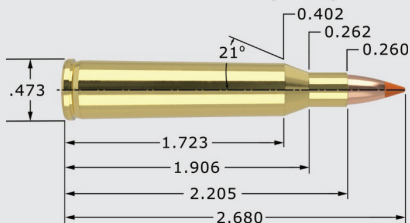

220 Swift - 34/35 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.680"	TESTED O.A.C.L.	B.C.	S.D.
Nosler®	C&D	34gr. FBHP	2.530"	0.113	0.097
Ballistic Tip® Lead-Free	BTLF	35gr. Spitzer	2.670"	0.201	0.100
CASE TYPE:	Winchester	PRIMER TYPE	CCI 200		
CASE HOLDS:	46.3 Gr. WATER	BARREL Length/Make	26" H-S Prec.		
		BARREL Twist	1-14"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 2520	40.0 MAX. 4332				89%
	38.0 * 4154				85%
	36.0 3977				80%
N150	40.5 MAX. 4337			**	103%
	38.5 * 4191				98%
	36.5 4044				93%
Varget	40.5 * MAX. 4342				95%
	38.5 4082				90%
	36.5 3822				85%
RL15	41.5 MAX. 4346				93%
	39.5 * 4134				89%
	37.5 3923				84%
H414	45.5 MAX. 4352			**	102%
	43.5 4192				98%
	41.5 * 4032				93%
H380	44.5 MAX. 4390			**	101%
	42.5 4253				97%
	40.5 * 4117				92%
H4895	39.5 MAX. 4400				94%
	37.5 * 4164				89%
	35.5 3928				84%
W760	45.0 MAX. 4406			**	102%
	43.0 4180				97%
	41.0 * 3955				93%
IMR 3031	37.5 * MAX. 4415				90%
Most Accurate	35.5 4180				85%
Powder Tested	33.5 3945				80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load