


Cartridge

220 Swift - 40 grain

Version 9.0

NOSLER®

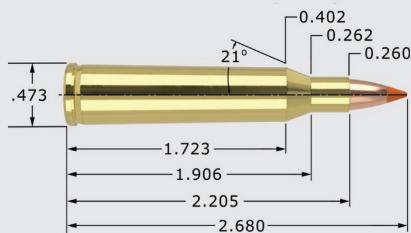

220 Swift - 40 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.680"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	BTLF	40gr. Spitzer	2.670"	0.220	0.114
Ballistic Tip® Varmint	BTV	40gr. Spitzer	2.670"	0.221	0.114
Varmageddon®	VMG	40gr. FB Tipped	2.670"	0.211	0.114

CASE TYPE:	Winchester	PRIMER TYPE	CCI 200
CASE HOLDS:	48.0 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N140	38.5 MAX. 3942	[Bar]	93%
	36.5 3692	[Bar]	88%
	34.5 * 3442	[Bar]	84%
IMR 4064	38.0 MAX. 3949	[Bar]	87%
	36.0 3695	[Bar]	83%
	34.0 * 3441	[Bar]	78%
IMR 3031	36.0 MAX. 4005	[Bar]	83%
	34.0 3684	[Bar]	79%
	32.0 * 3364	[Bar]	74%
N150	39.5 MAX. 4050	[Bar]	97%
	37.5 3825	[Bar]	92%
	35.5 * 3600	[Bar]	87%
Varget	39.0 MAX. 4067	[Bar]	88%
	37.0 3823	[Bar]	83%
	35.0 * 3579	[Bar]	79%
W760	44.0 * MAX. 4160	[Bar]	96%
	42.0 3898	[Bar]	92%
	40.0 3636	[Bar]	87%
RL15	39.0 * MAX. 4165	[Bar]	85%
	37.0 3892	[Bar]	80%
	35.0 3618	[Bar]	76%
H380 Most Accurate Powder Tested	44.0 * MAX. 4168	[Bar]	96%
	42.0 3991	[Bar]	92%
	40.0 3814	[Bar]	88%
H4895	39.0 MAX. 4201	[Bar]	89%
	37.0 3995	[Bar]	85%
	35.0 * 3790	[Bar]	80%
H414	44.0 * MAX. 4204	[Bar]	95%
	42.0 3977	[Bar]	91%
	40.0 3751	[Bar]	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load