


# Cartridge

## 220 Swift - 50/52/53 grain

Version 9.0

# NOSLER®

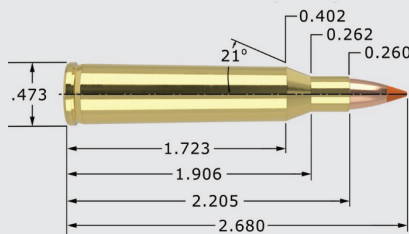

## 220 Swift - 50/52/53 grain

## 22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.680	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	<b>BT</b> 50gr. Spitzer	2.670"	0.238	0.142
Nosler®	<b>CB</b> 50gr. FBHP	2.640"	0.192	0.142
Nosler®	<b>CB</b> 50gr. FBSP	2.670"	0.195	0.142
Varmageddon®	<b>VM</b> 50gr. FB Tipped	2.670"	0.227	0.142
Custom Competition®	<b>CC</b> 52gr. HPBT	2.670"	0.220	0.148
Varmageddon®	<b>VM</b> 53gr. FB Tipped	2.670"	0.303	0.152

CASE TYPE:	Winchester	PRIMER TYPE	CCI 200
CASE HOLDS:	46.8 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>N140</b>	37.0 MAX. 3676	<div style="width: 92%;"></div>	92%
	35.0 3430	<div style="width: 87%;"></div>	87%
	33.0 * 3185	<div style="width: 82%;"></div>	82%
<b>RL15</b>	37.0 * MAX. 3754	<div style="width: 82%;"></div>	82%
	35.0 3548	<div style="width: 78%;"></div>	78%
	33.0 3343	<div style="width: 73%;"></div>	73%
<b>Varget</b>	36.0 * MAX. 3787	<div style="width: 83%;"></div>	83%
	34.0 3598	<div style="width: 79%;"></div>	79%
	32.0 3409	<div style="width: 74%;"></div>	74%
<b>H414</b>	42.0 MAX. 3845	<div style="width: 93%;"></div>	93%
	40.0 3645	<div style="width: 89%;"></div>	89%
	38.0 * 3445	<div style="width: 85%;"></div>	85%
<b>IMR 4831</b>	44.0 MAX. 3870	<div style="width: 101%;"></div>	** 101%
	42.0 3640	<div style="width: 96%;"></div>	96%
	40.0 * 3410	<div style="width: 91%;"></div>	91%
<b>IMR 4350</b>	42.0 * MAX. 3888	<div style="width: 96%;"></div>	96%
	40.0 3683	<div style="width: 91%;"></div>	91%
	38.0 3478	<div style="width: 87%;"></div>	87%
<b>N150</b>	39.0 MAX. 3890	<div style="width: 98%;"></div>	98%
	37.0 3686	<div style="width: 93%;"></div>	93%
	35.0 * 3482	<div style="width: 88%;"></div>	88%
<b>H380</b>	43.0 MAX. 3900	<div style="width: 97%;"></div>	97%
	41.0 3760	<div style="width: 92%;"></div>	92%
	39.0 * 3620	<div style="width: 88%;"></div>	88%
<b>AA 2520</b>	38.5 MAX. 3930	<div style="width: 85%;"></div>	85%
	Most Accurate 36.5 3750	<div style="width: 80%;"></div>	80%
	Powder Tested 34.5 * 3570	<div style="width: 76%;"></div>	76%
<b>W760</b>	43.0 MAX. 3988	<div style="width: 96%;"></div>	96%
	41.0 3792	<div style="width: 92%;"></div>	92%
	39.0 * 3595	<div style="width: 87%;"></div>	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load