


Cartridge

222 Rem - 50/52/53 grain

Version 9.0

NOSLER®

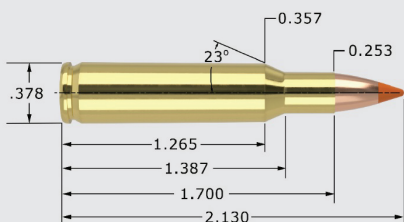

222 Rem - 50/52/53 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.130"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	50gr. Spitzer	2.130"	0.238	0.142
Nosler®	CB0	50gr. FBHP	2.130"	0.192	0.142
Nosler®	CB0	50gr. FBSP	2.130"	0.195	0.142
Varmageddon®	VMG	50gr. FB Tipped	2.130"	0.227	0.142
Custom Competition®	CC	52gr. HPBT	2.130"	0.220	0.148
Varmageddon®	VMG	53gr. FB Tipped	2.130"	0.303	0.152

CASE TYPE:	Remington	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	25.1 Gr. WATER	BARREL Length/Make	20" Lilja
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL10x	21.0 * MAX. 3038		94%
	20.0 2888		90%
	19.0 2738		85%
LT-30	20.0 MAX. 3079		93%
	19.0 * 2933		88%
	18.0 2787		83%
W748	24.5 MAX. 3100		** 102%
	23.5 3020		98%
	22.5 * 2940		93%
N120	19.5 MAX. 3140		95%
	18.5 3014		90%
	17.5 * 2889		85%
PP Varmint	25.5 MAX. 3163		** 103%
	24.5 3107		99%
	23.5 * 3052		95%
IMR 4198	20.0 MAX. 3172		92%
	19.0 3017		88%
	18.0 * 2862		83%
AA 2460	24.5 MAX. 3198		99%
	23.5 3103		95%
	22.5 * 3008		91%
H322	22.5 MAX. 3200		97%
	Most Accurate 21.5 3090		93%
	Powder Tested 20.5 * 2980		88%
CFE 223	26.5 MAX. 3202		** 106%
	25.5 3111		** 102%
	24.5 * 3020		98%
N130	22.0 MAX. 3247		** 103%
	21.0 3102		98%
	20.0 * 2958		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load