


# Cartridge

## 222 Rem Mag - 34/35 grain

Version 9.0

# NOSLER®

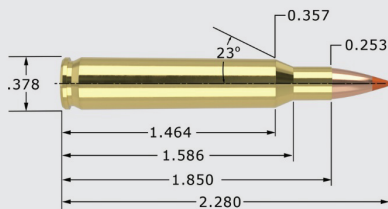

## 222 Rem Mag - 34/35 grain

## 22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.280"		TESTED O.A.C.L.	B.C.	S.D.
Nosler®	<b>CBD</b>	34gr. FBHP		2.170"	0.113	0.097
Ballistic Tip® Lead-Free	<b>BTLF</b>	35gr. Spitzer		2.280"	0.201	0.100
CASE TYPE:	Remington		PRIMER TYPE		Rem 7 1/2	
CASE HOLDS:	30.5	Gr. WATER	BARREL Length/Make		24" Lilja	
			BARREL Twist		1-14"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>AA 2015</b>	26.5	MAX. 3659		99%		
	25.5 *	3518		95%		
	24.5	3376		91%		
<b>Benchmark</b>	27.5	MAX. 3683		97%		
	26.5	3510		94%		
	25.5 *	3336		90%		
<b>H322</b>	26.5	MAX. 3700		94%		
	25.5	3518		90%		
	24.5 *	3335		87%		
<b>W748</b>	29.5	MAX. 3715		101%		
	28.5 *	3578		97%		
	27.5	3441		94%		
<b>X-Terminator</b>	27.5	MAX. 3728		92%		
	26.5 *	3621		89%		
	25.5	3515		86%		
<b>Norma 201</b>	29.0	MAX. 3734		**	108%	
	28.0	3618		**	104%	
	27.0 *	3502		101%		
<b>RL7</b>	24.5	MAX. 3761		87%		
	23.5 *	3589		84%		
	22.5	3417		80%		
<b>H335</b>	29.0 * MAX.	3795		97%		
	28.0	3672		93%		
	27.0	3550		90%		
<b>IMR 4198</b>	23.0	MAX. 3801		87%		
Most Accurate	22.0 *	3618		84%		
Powder Tested	21.0	3435		80%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load