


# Cartridge

## 222 Rem Mag - 50/52/53 grain

Version 9.0

# NOSLER®

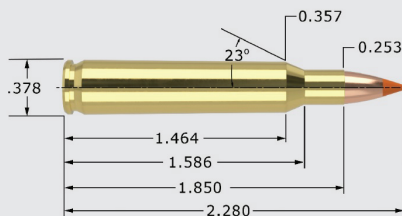

## 222 Rem Mag - 50/52/53 grain

## 22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.280"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	<b>BTV</b> 50gr. Spitzer	2.280"	0.238	0.142
Nosler®	<b>CGD</b> 50gr. FBHP	2.280"	0.192	0.142
Nosler®	<b>CGD</b> 50gr. FBSP	2.280"	0.195	0.142
Varmageddon®	<b>VMG</b> 50gr. FB Tipped	2.280"	0.227	0.142
Custom Competition®	<b>CC</b> 52gr. HPBT	2.280"	0.220	0.148
Varmageddon®	<b>VMG</b> 53gr. FB Tipped	2.280"	0.303	0.152

CASE TYPE:	Remington	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	28.7 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>W748</b>	27.0 MAX. 3151		98%
	26.0 3064		94%
	25.0 * 2976		91%
<b>IMR 4198</b>	21.0 MAX. 3190		85%
	20.0 3080		81%
	19.0 * 2970		77%
<b>Benchmark</b>	25.5 MAX. 3263		96%
	24.5 3094		92%
	23.5 * 2926		89%
<b>X-Terminator</b>	25.5 MAX. 3263		91%
	24.5 * 3135		88%
	23.5 3007		84%
<b>Norma 201</b>	27.0 MAX. 3316		** 107%
	26.0 3171		** 103%
	25.0 * 3027		99%
<b>IMR 3031</b>	25.0 MAX. 3328		97%
	24.0 3223		93%
	23.0 * 3118		89%
<b>H335</b>	27.5 * MAX. 3332		97%
	Most Accurate Powder Tested 26.5 3157		94%
	25.5 2982		90%
<b>BL-C(2)</b>	26.5 * MAX. 3332		94%
	25.5 3226		90%
	24.5 3119		87%
<b>IMR 4320</b>	27.5 MAX. 3368		** 104%
	26.5 3263		100%
	25.5 * 3158		97%
<b>IMR 4895</b>	26.0 * MAX. 3370		99%
	25.0 3200		95%
	24.0 3030		91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load