


# Cartridge

## 222 Rem Mag - 55 grain

Version 9.0

# NOSLER®

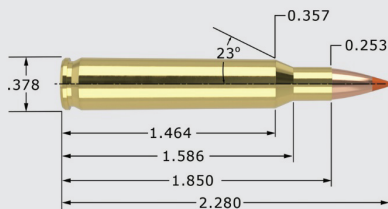

## 222 Rem Mag - 55 grain

## 22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.280"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	<b>BTV</b> 55gr. Spitzer	2.280"	0.267	0.157
Nosler®	<b>CGD</b> 55gr. FBSP	2.280"	0.218	0.157
Varmageddon®	<b>VMG</b> 55gr. FB Tipped	2.280"	0.255	0.157

CASE TYPE:	Remington	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	28.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL10x</b>	21.5 MAX. 2891		84%
	20.5 * 2803		81%
	19.5 2716		77%
<b>X-Terminator</b>	24.0 MAX. 3010		86%
	Most Accurate 23.0 2879		82%
	Powder Tested 22.0 * 2748		79%
<b>Norma 201</b>	26.0 * MAX. 3133		** 103%
	25.0 3010		99%
	24.0 2886		95%
<b>Benchmark</b>	25.0 MAX. 3138		95%
	24.0 2997		91%
	23.0 * 2857		87%
<b>IMR 4198</b>	21.0 MAX. 3180		85%
	20.0 3070		81%
	19.0 * 2960		77%
<b>IMR 4320</b>	26.0 * MAX. 3200		99%
	25.0 3070		95%
	24.0 2940		91%
<b>H335</b>	27.0 * MAX. 3230		96%
	26.0 3090		92%
	25.0 2950		89%
<b>BL-C(2)</b>	26.0 MAX. 3310		92%
	25.0 3210		89%
	24.0 * 3110		85%
<b>IMR 3031</b>	25.0 * MAX. 3330		97%
	24.0 3180		93%
	23.0 3030		89%
<b>IMR 4895</b>	26.0 * MAX. 3380		99%
	25.0 3260		95%
	24.0 3140		91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load