


# Cartridge

223 Rem - 50/52/53 grain

Version 9.0

# NOSLER®

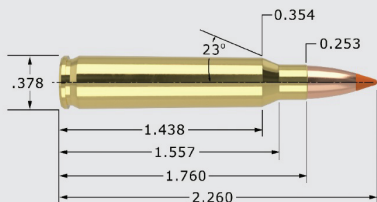

223 Rem - 50/52/53 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	<b>BTLF</b>	50gr. Spitzer	2.260"	0.251	0.142
Ballistic Tip® Varmint	<b>BTV</b>	50gr. Spitzer	2.260"	0.238	0.142
Nosler®	<b>CSO</b>	50gr. FBHP	2.200"	0.192	0.142
Nosler®	<b>CSO</b>	50gr. FBSP	2.230"	0.195	0.142
Varmageddon®	<b>VMG</b>	50gr. FB Tipped	2.260"	0.227	0.142
Custom Competition®	<b>CC</b>	52gr. HPBT	2.260"	0.220	0.148
Varmageddon®	<b>VMG</b>	53gr. FB Tipped	2.260"	0.303	0.152

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	27.5 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Varget</b>	26.0 * MAX. 3220		** 102%
	25.0 3092		98%
	24.0 2963		94%
<b>IMR 4198</b>	22.0 * MAX. 3230		93%
	21.0 3110		89%
	20.0 2990		84%
<b>W748</b>	26.5 * MAX. 3260		100%
	25.5 3150		97%
	24.5 3040		93%
<b>H335</b>	26.0 MAX. 3260		96%
	25.0 3170		92%
	24.0 * 3080		89%
<b>PP Varmint</b>	27.0 MAX. 3262		99%
	26.0 3119		96%
	25.0 * 2977		92%
<b>CFE 223</b>	29.0 MAX. 3379		** 105%
	28.0 3233		** 102%
	27.0 * 3088		98%
<b>TAC</b>	27.0 MAX. 3379		100%
	26.0 3267		96%
	25.0 * 3156		92%
<b>N133</b>	25.0 MAX. 3412		** 106%
	24.0 3301		** 101%
	23.0 * 3190		97%
<b>AA 2460</b>	28.0 MAX. 3497		** 103%
	27.0 3391		99%
	26.0 * 3285		96%
<b>Benchmark</b>	26.5 MAX. 3540		** 104%
Most Accurate	25.5 * 3412		100%
Powder Tested	24.5 3285		96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load