


# Cartridge

223 Rem - 60/62 grain

Version 9.0

# NOSLER®

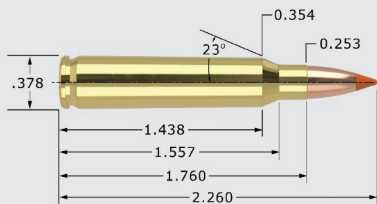

223 Rem - 60/62 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	<b>BTV</b>	60gr. Spitzer	2.260"	0.270	0.171
Partition®	<b>PT</b>	60gr. Spitzer	2.260"	0.228	0.171
Varmageddon®	<b>VMG</b>	62gr. FBHP	2.180"	0.251	0.176

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	27.6 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-7"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Varget</b>	24.5 MAX. 2990		96%
	23.5 * 2877		92%
	22.5 2764		88%
<b>AA 2460</b>	23.0 * MAX. 3017		84%
	22.0 2906		81%
	21.0 2794		77%
<b>RL15</b>	25.5 * MAX. 3063		96%
	24.5 2929		92%
	23.5 2794		89%
<b>TAC</b>	24.5 MAX. 3070		90%
	23.5 * 2965		86%
	22.5 2861		83%
<b>H322</b>	23.5 * MAX. 3070		92%
	22.5 2966		88%
	21.5 2863		84%
<b>H335</b>	25.0 * MAX. 3105		92%
	24.0 3008		88%
	23.0 2912		85%
<b>IMR 4895</b>	25.5 * MAX. 3126		101%
	24.5 2990		97%
	23.5 2855		93%
<b>H4895</b>	25.5 * MAX. 3134		** 102%
	24.5 3050		98%
	23.5 2965		94%
<b>Benchmark</b>	23.5 MAX. 3141		92%
	Most Accurate 22.5 * 3039		88%
	Powder Tested 21.5 2937		84%
<b>CFE 223</b>	27.0 * MAX. 3152		98%
	26.0 3037		94%
	25.0 2922		91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load