


# Cartridge

223 Rem - 64 grain

Version 9.0

# NOSLER®

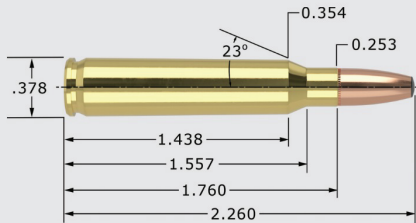

223 Rem - 64 grain

22 Cal. (.224")

**MAXIMUM SAAMI O.A.C.L.**

**2.260"**

TESTED O.A.C.L.

B.C.

S.D.

Bonded Solid Base®



64gr. PPT

2.175"

0.231

0.182

CASE TYPE:	Nosler	PRIMER TYPE	WMSR #41
CASE HOLDS:	27.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-12"
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4895</b>	25.0 * MAX. 2894		101%
	24.0 2771		97%
	23.0 2648		93%
<b>Varget</b>	25.0 * MAX. 2899		100%
	24.0 2779		96%
	23.0 2658		92%
<b>Benchmark</b>	23.0 * MAX. 2907		92%
	22.0 2837		88%
	21.0 2768		84%
<b>H322</b>	22.5 MAX. 2919		90%
	21.5 * 2823		86%
	20.5 2727		82%
<b>CFE 223</b> Most Accurate Powder Tested	26.0 * MAX. 2933		96%
	25.0 2783		93%
	24.0 2634		89%
<b>RL15</b>	25.0 * MAX. 2933		96%
	24.0 2789		93%
	23.0 2646		89%
<b>H335</b>	24.5 MAX. 2945		92%
	23.5 * 2834		88%
	22.5 2723		85%
<b>TAC</b>	24.5 * MAX. 2981		92%
	23.5 2885		88%
	22.5 2789		85%
<b>AA 2460</b>	23.5 MAX. 2989		88%
	22.5 2871		84%
	21.5 * 2752		80%
<b>H4895</b>	24.0 MAX. 2993		98%
	23.0 2858		94%
	22.0 * 2724		90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load