


# Cartridge

223 Rem - 69/70 grain

Version 9.0

# NOSLER®

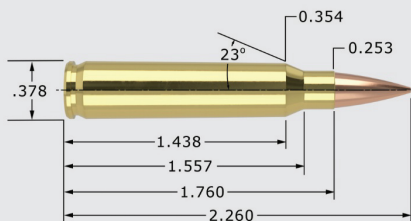

223 Rem - 69/70 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	<b>CC</b>	69gr. HPBT	2.260"	0.305	0.196
AccuBond®	<b>AB</b>	70gr. Spitzer	2.260"	0.370	0.199
Reduced Drag Factor™	<b>RDF</b>	70gr. HPBT	2.260"	0.416	0.199

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	27.5 Gr. WATER	BARREL Length/Make	20" Pac-Nor
		BARREL Twist	1-7'

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL15</b>	24.5 MAX.	2786	93%
	23.5 *	2641	89%
	22.5	2495	85%
<b>N540</b>	25.5 MAX.	2807	** 103%
	24.5	2639	99%
	23.5 *	2470	95%
<b>IMR 4895</b>	23.5 MAX.	2809	93%
	22.5 *	2666	89%
	21.5	2522	85%
<b>H4895</b>	24.0 MAX.	2810	96%
	23.0	2669	92%
	22.0 *	2528	88%
<b>TAC</b>	24.5 MAX.	2826	90%
	23.5	2686	87%
	22.5 *	2546	83%
<b>Varget</b>	25.0 MAX.	2845	98%
	24.0	2729	94%
	23.0 *	2613	90%
<b>N135</b>	23.5 MAX.	2854	99%
	22.5	2731	95%
	21.5 *	2607	91%
<b>H335</b>	24.0 MAX.	2862	89%
	23.0	2738	85%
	22.0 *	2614	81%
<b>AA 2230</b>	23.5 * MAX.	2866	87%
Most Accurate Powder Tested	22.5	2791	83%
	21.5	2716	80%
<b>W748</b>	26.0 MAX.	2957	98%
	25.0	2840	95%
	24.0 *	2723	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load