


Cartridge

223 Rem - 77/80 grain

Version 9.0

NOSLER®

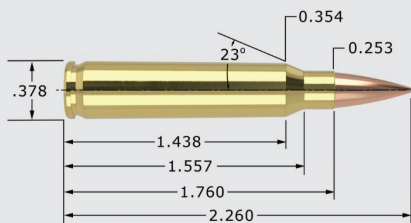

223 Rem - 77/80 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	77gr. HPBT	2.260"	0.340	0.219
Reduced Drag Factor™	RDF	77gr. HPBT	2.260"	0.454	0.219
Custom Competition®	CC	80gr. HPBT	2.260"	0.415	0.228

CASE TYPE:	Nosler	PRIMER TYPE		WSR	
CASE HOLDS:	26.5 Gr. WATER	BARREL Length/Make		BARREL Twist	20" Pac-Nor 1-7"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2015	21.0 MAX.	2554	90%
	20.0 *	2449	86%
	19.0	2344	81%
H335	23.0 MAX.	2592	88%
	22.0 *	2479	84%
	21.0	2367	80%
N540	24.5 MAX.	2600	** 103%
	23.5 *	2474	99%
	22.5	2348	94%
W748	24.0 MAX.	2604	94%
	23.0 *	2494	90%
	22.0	2385	86%
N140	23.5 MAX.	2635	** 103%
	22.5 *	2529	99%
	21.5	2423	94%
Varget	24.0 MAX.	2655	98%
	23.0	2553	94%
	22.0 *	2451	90%
TAC	23.5 MAX.	2656	90%
	22.5 *	2534	86%
	21.5	2411	82%
IMR 4064	23.5 MAX.	2667	98%
	22.5 *	2567	94%
	21.5	2466	90%
RL15	24.0 MAX.	2686	94%
	23.0 *	2563	90%
	22.0	2440	86%
H4895	23.5 * MAX.	2697	97%
	22.5	2585	93%
	21.5	2473	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load