


Cartridge

24 Nosler - 105/107 grain

Version 9.0

NOSLER®

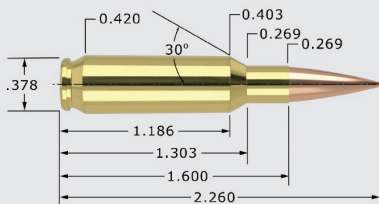

24 Nosler - 105/107 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™	RDF	105gr. HPBT	2.250"	0.571	0.254
Custom Competition®	CC	107gr. HPBT	2.250"	0.525	0.259
CASE TYPE:	Nosler	PRIMER TYPE	WSR		
CASE HOLDS:	25.8 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 2520	24.0 MAX. 2466		96%		
	23.0 * 2367		92%		
	22.0 2268		88%		
Benchmark Most Accurate Powder Tested	23.0 MAX. 2468		96%		
	22.0 * 2363		92%		
	21.0 2258		88%		
Varget	24.0 MAX. 2468		**	101%	
	23.0 2372			96%	
	22.0 * 2275			92%	
H4895	23.0 MAX. 2473			98%	
	22.0 * 2370			94%	
	21.0 2268			89%	
TAC	24.0 MAX. 2482			94%	
	23.0 * 2391			91%	
	22.0 2299			87%	
H335	24.5 MAX. 2483			96%	
	23.5 2386			92%	
	22.5 * 2289			89%	
BL-C(2)	25.5 * MAX. 2485		**	100%	
	24.5 2368			96%	
	23.5 2251			92%	
W748	25.0 MAX. 2493		**	101%	
	24.0 * 2406			97%	
	23.0 2319			93%	
RL15	25.0 * MAX. 2521		**	101%	
	24.0 2429			97%	
	23.0 2337			93%	
CFE 223	27.0 MAX. 2625		**	105%	
	26.0 * 2545		**	101%	
	25.0 2465			97%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load