


Cartridge

24 Nosler - 55 grain

Version 9.0

NOSLER®

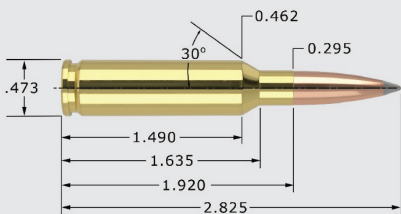

24 Nosler - 55 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	55gr. Spitzer	2.160"	0.276	0.133
Ballistic Tip® Lead-Free	BTLF	55gr. Spitzer	2.210"	0.288	0.133
Due to the longer bearing surface of Ballistic Tip Lead-Free bullets, always begin with starting loads.					
Nosler®	C&D	55gr. FBSP	2.150"	0.203	0.133
Varmageddon®	VMG	55gr. FB Tipped	2.160"	0.252	0.133

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	29.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL10x	26.0 MAX. 3341		** 101%
	25.0 3215		97%
	24.0 3088		93%
H322	27.0 MAX. 3352		** 101%
	26.0 3232		97%
	25.0 3112		93%
LT-32	26.0 MAX. 3374		** 102%
	25.0 3244		98%
	24.0 3115		94%
RL7 Most Accurate Powder Tested	25.0 MAX. 3377		94%
	24.0 3234		90%
	23.0 3091		86%
N530	28.0 MAX. 3378		** 107%
	27.0 3235		** 103%
	26.0 3091		100%
H335	30.0 MAX. 3387		** 105%
	29.0 3305		** 102%
	28.0 3223		98%
H4198	25.0 MAX. 3397		97%
	24.0 3250		93%
	23.0 3103		89%
TAC	30.5 MAX. 3415		** 107%
	29.5 3310		** 103%
	28.5 3206		100%
X-Terminator	29.0 MAX. 3419		** 103%
	28.0 3350		99%
	27.0 3281		95%
AA 2230	29.0 MAX. 3424		** 102%
	28.0 3324		99%
	27.0 3225		95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load