


Cartridge

24 Nosler - 70 grain

Version 9.0

NOSLER®

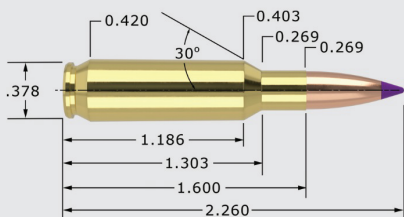

24 Nosler - 70 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.260	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	70gr. Spitzer	2.210"	0.310	0.169
Varmageddon®	VMG	70gr. FB Tipped	2.210"	0.305	0.169
CASE TYPE:	Nosler	PRIMER TYPE	WSR		
CASE HOLDS:	28.8 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4166	26.0 MAX.	2930	96%		
	25.0 *	2819	92%		
	24.0	2709	89%		
LT-32	24.0 MAX.	2943	95%		
	23.0	2823	91%		
	22.0 *	2702	87%		
IMR 4320	27.5 * MAX.	2949	** 104%		
	26.5	2813	100%		
	25.5	2677	96%		
Norma 202	27.0 MAX.	2993	** 107%		
	26.0	2878	** 103%		
	25.0 *	2763	99%		
H335	27.5 MAX.	3046	97%		
	26.5	2921	93%		
	25.5 *	2795	90%		
IMR 8208 XBR Most Accurate Powder Tested	26.5 MAX.	3047	** 101%		
	25.5 *	2923	97%		
	24.5	2798	93%		
TAC	27.5 MAX.	3055	97%		
	26.5 *	2929	93%		
	25.5	2803	90%		
H4895	26.5 MAX.	3080	** 101%		
	25.5 *	2951	97%		
	24.5	2822	93%		
AA 2520	28.5 MAX.	3081	** 102%		
	27.5 *	2961	98%		
	26.5	2841	95%		
Benchmark	27.0 MAX.	3100	** 101%		
	26.0	2976	98%		
	25.0 *	2851	94%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load