


Cartridge

24 Nosler - 80 grain

Version 9.0

NOSLER®

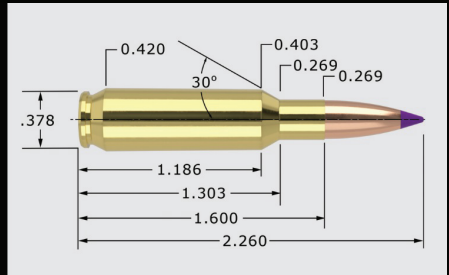

24 Nosler - 80 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV 80gr. Spitzer	2.210"	0.329	0.194

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	27.1 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
-------------	------------------	--------------------	-----------------------

IMR 4166	25.0 * MAX.	2754		98%
	24.0	2637		94%
	23.0	2521		90%
LT-32	23.5 MAX.	2795		99%
	22.5 *	2693		94%
	21.5	2591		90%
H335	26.5 MAX.	2822		99%
	25.5 *	2703		96%
	24.5	2583		92%
Norma 202	26.0 MAX.	2827		** 109%
	25.0 *	2721		** 105%
	24.0	2616		** 101%
Benchmark	25.5 MAX.	2828		** 102%
	24.5 *	2713		98%
	23.5	2599		94%
RL15	26.5 MAX.	2833		** 102%
	25.5 *	2723		98%
	24.5	2613		94%
IMR 8208 XBR Most Accurate Powder Tested	25.5 MAX.	2855		** 103%
	24.5 *	2753		99%
	23.5	2652		95%
AA 2520	26.5 * MAX.	2860		** 101%
	25.5	2776		97%
	24.5	2691		93%
Varget	27.0 * MAX.	2885		** 108%
	26.0	2786		** 104%
	25.0	2687		100%
TAC	26.5 * MAX.	2889		99%
	25.5	2790		96%
	24.5	2690		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load