


Cartridge

24 Nosler - 85/90 grain

Version 9.0

NOSLER®

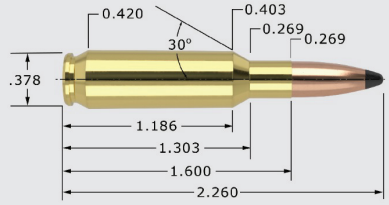

24 Nosler - 85/90 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	85gr. Spitzer	2.180"	0.315	0.206
AccuBond®	AB	90gr. Spitzer	2.210"	0.376	0.218
Ballistic Tip®	BT	90gr. Spitzer	2.210"	0.365	0.218
Expansion Tip®	ET	90gr. Spitzer	2.210"	0.403	0.218

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	26.5 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Norma 202	24.5 MAX. 2608		** 105%
	23.5 2501		** 101%
	22.5 * 2393		96%
IMR 4320	25.5 * MAX. 2609		** 105%
	24.5 2498		** 100%
	23.5 2386		96%
Benchmark	24.0 MAX. 2639		98%
	23.0 * 2524		94%
	22.0 2409		90%
Varget Most Accurate Powder Tested	25.5 MAX. 2662		** 104%
	24.5 2583		100%
	23.5 * 2504		96%
TAC	25.0 * MAX. 2677		96%
	24.0 2601		92%
	23.0 2524		88%
BL-C(2)	27.0 * MAX. 2680		** 103%
	26.0 2591		100%
	25.0 2501		96%
IMR 8208 XBR	24.5 MAX. 2685		** 102%
	23.5 * 2582		97%
	22.5 2480		93%
RL15	26.0 * MAX. 2686		** 102%
	25.0 2585		98%
	24.0 2484		94%
AA 2520	26.5 MAX. 2708		** 103%
	25.5 2694		99%
	24.5 * 2680		95%
CFE 223	27.5 * MAX. 2771		** 104%
	26.5 2671		100%
	25.5 2571		96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested
 ** = Compressed load