


Cartridge

24 Nosler - 95/100 grain

Version 9.0

NOSLER®

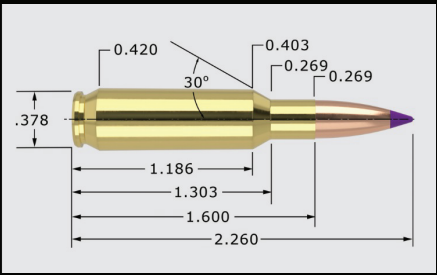

24 Nosler - 95/100 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	95gr. Spitzer	2.210"	0.379	0.230
CT® Ballistic Silvertip®	BST	95gr. Spitzer	2.210"	0.379	0.230
Partition®	PT	95gr. Spitzer	2.200"	0.365	0.230
Partition®	PT	100gr. Spitzer	2.210"	0.384	0.242

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	26.2 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
-------------	------------------	--------------------	-----------------------

Benchmark	23.5 * MAX.	2544		97%
Most Accurate Powder Tested	22.5	2445		93%
	21.5	2347		89%
Norma 202	24.0 MAX.	2549	**	104%
	23.0 *	2452		100%
	22.0	2356		95%
Varget	24.5 MAX.	2568	**	101%
	23.5 *	2468		97%
	22.5	2367		93%
IMR 8208 XBR	23.0 * MAX.	2539		96%
	22.0	2464		92%
	21.0	2388		88%
RL15	24.5 MAX.	2539		97%
	23.5 *	2442		93%
	22.5	2346		89%
TAC	24.5 MAX.	2592		95%
	23.5	2501		91%
	22.5 *	2410		87%
AA 2520	24.5 * MAX.	2587		96%
	23.5	2551		92%
	22.5	2514		89%
BL-C(2)	26.5 MAX.	2609	**	103%
	25.5	2502		99%
	24.5 *	2395		95%
W748	25.5 MAX.	2576	**	101%
	24.5 *	2481		97%
	23.5	2385		93%
CFE 223	27.5 * MAX.	2730	**	105%
	26.5	2625	**	101%
	25.5	2520		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load