


Cartridge

240 Wby Mag - 85/90 grain

Version 9.0

NOSLER®

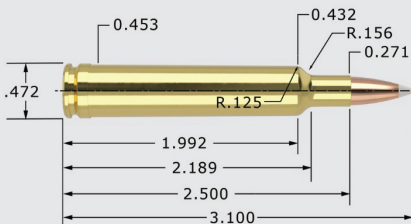

240 Wby Mag - 85/90 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	3.100"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	85gr. Spitzer	3.060"	0.315 0.206
AccuBond®	AB	90gr. Spitzer	3.060"	0.376 0.218
Ballistic Tip®	BT	90gr. Spitzer	3.060"	0.365 0.218
Expansion Tip®	ET	90gr. Spitzer	3.060"	0.403 0.218

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Weatherby	PRIMER TYPE	Fed 210M
CASE HOLDS:	60.4 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MAZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H414	48.5 MAX. 3286	[Bar]	84%
	46.5 3182	[Bar]	80%
	44.5 * 3077	[Bar]	77%
Magnum	59.5 MAX. 3308	[Bar]	100%
	57.5 * 3208	[Bar]	97%
	55.5 3109	[Bar]	93%
W760	49.0 MAX. 3319	[Bar]	85%
	47.0 3222	[Bar]	81%
	45.0 * 3125	[Bar]	78%
H1000	58.5 MAX. 3336	[Bar]	** 102%
	56.5 * 3245	[Bar]	99%
	54.5 3155	[Bar]	95%
RL19	52.5 MAX. 3443	[Bar]	94%
	50.5 3308	[Bar]	91%
	48.5 * 3174	[Bar]	87%
N160	52.0 MAX. 3445	[Bar]	96%
	Most Accurate 50.0 3313	[Bar]	92%
	Powder Tested 48.0 * 3181	[Bar]	88%
IMR 4350	51.0 MAX. 3448	[Bar]	90%
	49.0 3303	[Bar]	87%
	47.0 * 3158	[Bar]	83%
H4831	54.0 * MAX. 3453	[Bar]	93%
	52.0 3364	[Bar]	90%
	50.0 3275	[Bar]	86%
IMR 4831	53.0 * MAX. 3488	[Bar]	94%
	51.0 3343	[Bar]	90%
	49.0 3198	[Bar]	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load