


Cartridge

240 Wby Mag - 95/100 grain

Version 9.0

NOSLER®

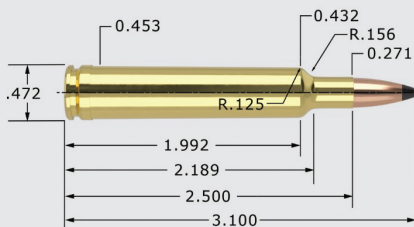

240 Wby Mag - 95/100 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	3.100"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip®	BT	95gr. Spitzer	3.060"	0.379	0.230
CT® Ballistic Silvertip®	BST	95gr. Spitzer	3.060"	0.379	0.230
Partition®	PT	95gr. Spitzer	3.060"	0.365	0.230
Partition®	PT	100gr. Spitzer	3.060"	0.384	0.242

CASE TYPE:	Weatherby	PRIMER TYPE	Fed 210M
CASE HOLDS:	58.8 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	47.0 * MAX. 3070		85%
	45.0 2930		82%
	43.0 2790		78%
N160	48.0 * MAX. 3160		91%
	46.0 3065		87%
	44.0 2970		83%
W760	47.0 MAX. 3198		84%
	45.0 * 3078		80%
	43.0 2958		77%
H1000	56.5 MAX. 3226		** 102%
	54.5 3125		98%
	52.5 * 3025		94%
RL19	51.0 MAX. 3242		94%
	49.0 3140		91%
	47.0 3038		87%
H4831SC	52.0 MAX. 3244		92%
	50.0 * 3159		89%
	48.0 3074		85%
Magnum	61.0 MAX. 3253		** 105%
	Most Accurate 59.0 * 3183		** 102%
	Powder Tested 57.0 3114		98%
IMR 7828	53.5 * MAX. 3260		97%
	51.5 3130		93%
	49.5 3000		90%
RL22	53.0 * MAX. 3352		98%
	51.0 3217		94%
	49.0 3082		91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load