


CARTRIDGE

243 Winchester Super Short Magnum - 55 grain

Version 8.0

Nosler®
UP FRONT

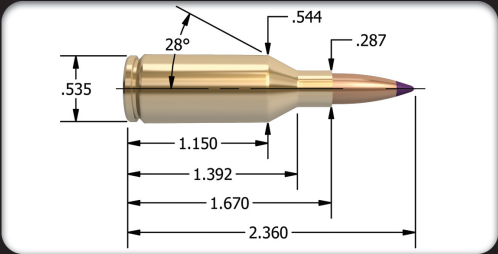

243 WSSM - 55 grain

6mm (.243")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.360"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	55gr. Spitzer	2.260"	0.276	0.133
Ballistic Tip® Lead Free	55gr. Spitzer	2.260"	0.288	0.133
CT® Ballistic Silvertip®	55gr. Spitzer	2.260"	0.276	0.133
Nosler®	55gr. FBSP	2.055"	0.203	0.133
Varmageddon®	55gr. FBHP	2.075"	0.192	0.133
Varmageddon®	55gr. FB Tipped	2.160"	0.252	0.133

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	52.3 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N150	48.0 MAX.	4082	** 108%
	46.0 *	3939	** 103%
	44.0	3830	99%
H380	51.5 MAX.	4109	** 104%
	49.5	4012	100%
	47.5 *	3889	96%
Varget	47.0 * MAX.	4125	97%
	45.0	3980	93%
	43.0	3851	89%
A-2495	46.0 MAX.	4147	100%
	44.0	3982	96%
	42.0 *	3833	91%
H414 Most Accurate Powder Tested	53.0 * MAX.	4150	** 106%
	51.0	4025	** 102%
	49.0	3826	98%
RL15	47.0 MAX.	4161	94%
	45.0 *	4002	90%
	43.0	3828	86%
W760	53.0 MAX.	4162	** 106%
	51.0	4042	** 102%
	49.0 *	3915	98%
H4895	46.0 MAX.	4165	97%
	44.0 *	4020	92%
	42.0	3878	88%
IMR 4895	46.0 MAX.	4196	97%
	44.0 *	4027	92%
	42.0	3880	88%
BL-C2	49.5 * MAX.	4198	96%
	47.5	4028	92%
	45.5	3900	88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load