


CARTRIDGE

243 Winchester Super Short Magnum-85/90 grain

Version 8.0

Nosler®
UP FRONT

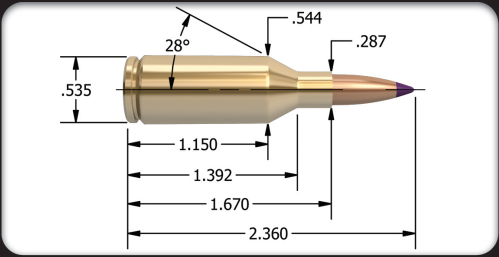

243 WSSM - 85/90 grain

6mm (.243")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.360"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	90gr. Spitzer	2.260"	0.376	0.218
Ballistic Tip®	90gr. Spitzer	2.260"	0.365	0.218
E-Tip®	90gr. Spitzer	2.260"	0.403	0.218
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	85gr. Spitzer	2.260"	0.315	0.206
CASE TYPE:	Winchester	PRIMER TYPE	WLR	
CASE HOLDS:	49.6 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4895	38.5 MAX.	3242	85%
	36.5	3129	81%
	34.5 *	3000	76%
RL15	39.5 MAX.	3255	83%
	37.5	3146	79%
	35.5 *	3027	75%
Varget	39.5 MAX.	3258	86%
	37.5 *	3142	82%
	35.5	3013	77%
H4831SC	47.5 MAX.	3260	100%
	45.5	3139	96%
	43.5 *	3031	91%
IMR 4350	45.0 MAX.	3320	97%
	43.0	3205	92%
	41.0 *	3071	88%
H4350	44.0 * MAX.	3332	94%
	42.0	3215	90%
	40.0	3093	85%
Viht N160 Most Accurate Powder Tested	47.0 MAX.	3341	** 105%
	45.0 *	3227	** 101%
	43.0	3124	96%
H414	45.5 * MAX.	3354	96%
	43.5	3235	91%
	41.5	3109	87%
W760	45.0 MAX.	3358	95%
	43.0	3240	91%
	41.0 *	3124	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load