


CARTRIDGE

243 Winchester Super Short Magnum-95/100 grain Version 8.0

Nosler®
UP FRONT

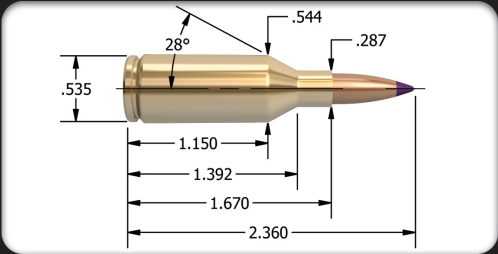

243 WSSM - 95/100 grain 6mm (.243")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.360"			TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip®			95gr. Spitzer	2.260"	0.379	0.230
CT® Ballistic Silvertip®			95gr. Spitzer	2.260"	0.379	0.230
Partition®			95gr. Spitzer	2.260"	0.365	0.230
Partition®			100gr. Spitzer	2.260"	0.384	0.242
CASE TYPE:	Winchester		PRIMER TYPE		WLR	
CASE HOLDS:	49.5	Gr. WATER	BARREL Length/Make		24" Wiseman	
			BARREL Twist		1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Varget	36.5 MAX.	3007	80%
	34.5	2889	75%
	32.5 *	2775	71%
RL15 Most Accurate Powder Tested	37.0 MAX.	3010	78%
	35.0	2919	74%
	33.0 *	2796	69%
H4831SC	44.5 MAX.	3065	94%
	42.5 *	2966	89%
	40.5	2877	85%
IMR 4831	44.0 MAX.	3131	95%
	42.0	3003	90%
	40.0 *	2896	86%
H414	42.5 * MAX.	3132	89%
	40.5	3019	85%
	38.5	2908	81%
W760	43.0 MAX.	3143	91%
	41.0 *	3031	87%
	39.0	2907	83%
H4350	42.0 * MAX.	3148	90%
	40.0	3048	86%
	38.0	2940	81%
IMR 4350	44.0 MAX.	3177	94%
	42.0	3032	90%
	40.0 *	2914	86%
Viht N165	50.0 MAX.	3222	** 112%
	48.0 *	3126	** 108%
	46.0	2984	** 103%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load