


Cartridge

243 Win - 105/107 grain (Fast Twist)

Version 9.0

NOSLER®

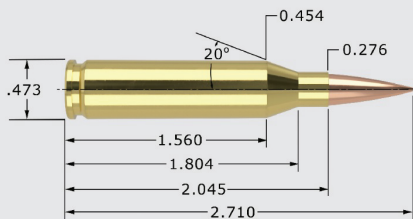

243 Win - 105/107 grain (Fast Twist)

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.710"	TESTED O.A.C.L.	B.C.	S.D.	
Reduced Drag Factor™	RDF	105gr. HPBT	2.710"	0.571	0.254
Custom Competition®	CC	107gr. HPBT	2.710"	0.525	0.259

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	48.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831 Most Accurate Powder Tested	43.5 MAX. 2901		94%
	41.5 * 2777		90%
	39.5 2654		86%
IMR 4451	39.0 * MAX. 2935		86%
	37.0 2776		82%
	35.0 2617		78%
IMR 7977	45.0 * MAX. 2959		101%
	43.0 2810		96%
	41.0 2661		92%
Norma 204	41.0 MAX. 2959		95%
	39.0 * 2812		90%
	37.0 2665		86%
RL17	39.0 * MAX. 2969		84%
	37.0 2822		80%
	35.0 2675		75%
RL25	46.0 MAX. 2997	**	104%
	44.0 2835		100%
	42.0 * 2673		95%
IMR 4831	41.0 MAX. 3001		91%
	39.0 * 2837		87%
	37.0 2672		82%
RL19	43.0 MAX. 3002		97%
	41.0 * 2836		93%
	39.0 2670		88%
Norma MRP	44.0 MAX. 3033		101%
	42.0 * 2871		96%
	40.0 2709		92%
Magnum	48.0 MAX. 3044	**	102%
	46.0 * 2899		97%
	44.0 2755		93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load