


# Cartridge

243 Win - 55 grain

Version 9.0

# NOSLER®

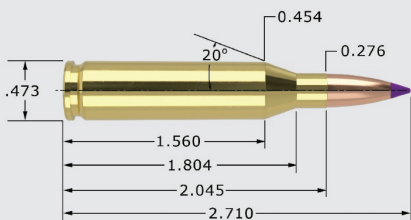

243 Win - 55 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.	2.710"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	<b>BTLF</b> 55gr. Spitzer	2.610"	0.288	0.133
Due to the longer bearing surface of Ballistic Tip Lead-Free bullets, always begin with starting loads.				
Ballistic Tip® Varmint	<b>BTV</b> 55gr. Spitzer	2.610"	0.276	0.133
Nosler®	<b>CRD</b> 55gr. FBSP	2.450"	0.203	0.133
Varmageddon®	<b>VMG</b> 55gr. FB Tipped	2.590"	0.252	0.133

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	53.9 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4451</b>	49.0 MAX. 3850		97%
	47.0 * 3703		93%
	45.0 3557		89%
<b>H414</b> Most Accurate Powder Tested	49.0 * MAX. 3870		95%
	47.0 3724		91%
	45.0 3579		87%
<b>IMR 4350</b>	50.0 MAX. 3873		99%
	48.0 * 3736		95%
	46.0 3599		91%
<b>IMR 3031</b>	42.0 MAX. 3937		87%
	40.0 * 3777		82%
	38.0 3617		78%
<b>Varget</b>	45.5 MAX. 3941		91%
	43.5 3758		87%
	41.5 * 3575		83%
<b>IMR 4320</b>	45.5 * MAX. 3942		92%
	43.5 3743		88%
	41.5 3544		84%
<b>H4350</b>	50.0 MAX. 3947		98%
	48.0 3802		94%
	46.0 * 3657		90%
<b>H380</b>	47.5 * MAX. 3951		93%
	45.5 3771		89%
	43.5 3591		85%
<b>H4895</b>	43.0 * MAX. 3988		88%
	41.0 3828		84%
	39.0 3668		80%
<b>RL15</b>	45.0 * MAX. 3993		87%
	43.0 3784		83%
	41.0 3576		79%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load