


Cartridge

243 Win - 80 grain

Version 9.0

NOSLER®

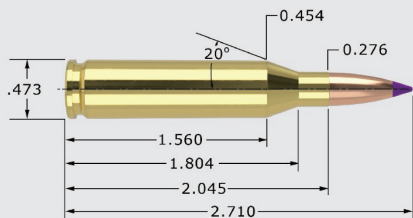

243 Win - 80 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.710"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint		BTV	80gr. Spitzer	2.680"	0.329 0.194
CASE TYPE:	Nosler		PRIMER TYPE	Rem 9 1/2	
CASE HOLDS:	51.5	Gr. WATER	BARREL Length/Make	24" Lilja	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
N160	45.0 * MAX.	3300		97%	
	43.0	3178		93%	
	41.0	3056		88%	
H4831SC	47.0 MAX.	3308		95%	
	45.0 *	3169		91%	
	43.0	3030		87%	
Varget	39.0 MAX.	3312		82%	
	37.0	3182		78%	
	35.0 *	3052		73%	
IMR 4451	43.5 MAX.	3326		90%	
	41.5	3189		86%	
	39.5 *	3052		82%	
RL15 Most Accurate Powder Tested	41.0 * MAX.	3354		83%	
	39.0	3193		79%	
	37.0	3032		75%	
H414	44.0 MAX.	3368		89%	
	42.0 *	3214		85%	
	40.0	3060		81%	
H4350	44.0 * MAX.	3375		90%	
	42.0	3235		86%	
	40.0	3095		82%	
Hunter	46.0 MAX.	3388		92%	
	44.0 *	3310		88%	
	42.0	3232		84%	
IMR 4831	46.0 MAX.	3419		96%	
	44.0 *	3250		91%	
	42.0	3082		87%	
RL17	44.0 * MAX.	3432		88%	
	42.0	3298		84%	
	40.0	3164		80%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load